

Glass Tube Liquid Level Gauge PN 10

Type 700.A3

Applications

Direct reading liquid level indicator with glass tube for general applications up to CL150. Increased safety with ball check valves and glass protection.

Special Features

- Connection top-bottom pivoted
- Handwheel
- Glass protection

General Data

Center-to-center ME	max. 1200 mm
Sight length	ME – 110 mm
Diameter of glass tube*)	Ø 13,5 x 1,75mm
Actuation	handwheel
Valve passage	8 mm
Process connection	male thread G 1/2 DIN ISO 228 flange DN 15 - 25 / PN 10

Materials

- gauge heads SS 1.4571
- gaskets for glass tube PTFE
- glass tube DURAN


The materials may vary depending upon availability.

Design Data

Design temperature / Design pressure	up to 120°C / 10bar up to 200°C / 8bar
--------------------------------------	---

Accessories

glass protection**)	plexiglass cover Ø 42mm
visual help	coloured float
Scale	division and unity to customers spec.

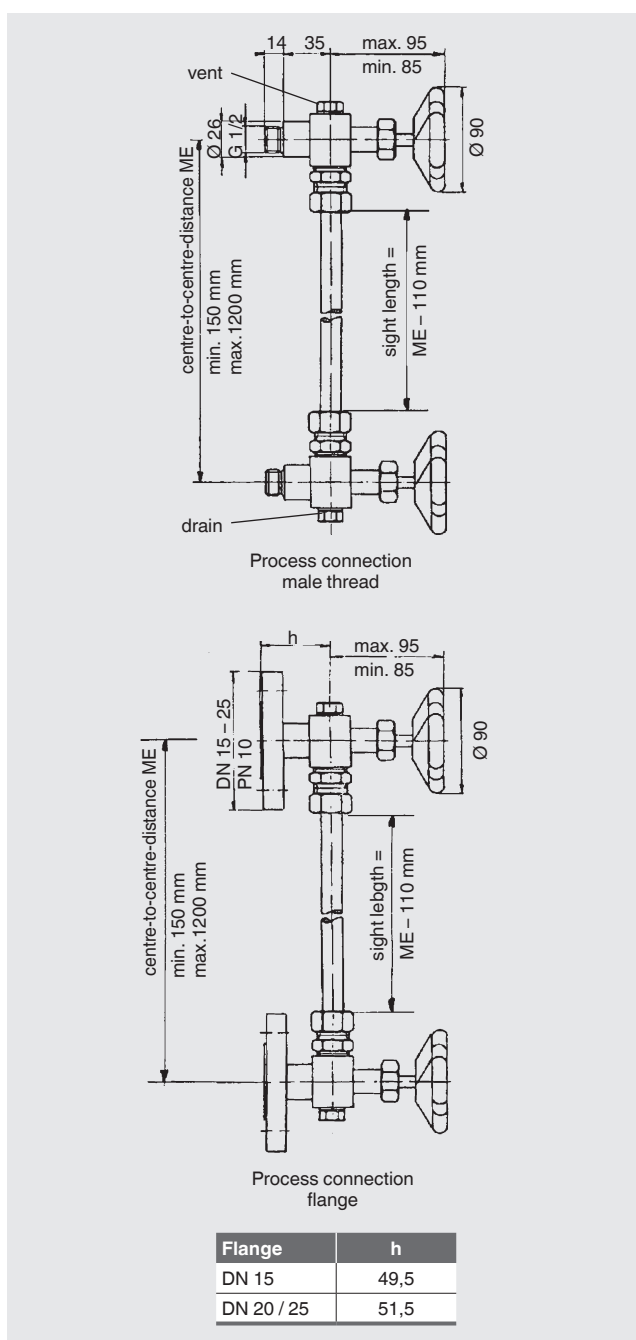

*) length glasstube = ME – 65 mm

**) length = ME – 55, product temperature max. 80°C.