

Glass Tube Liquid Level Gauge PN 10 Type 700.A4

Applications

Direct reading liquid level indicator with glass tube for general applications up to CL150. Increased safety with ball check valves and glass protection.

Special Features

- Connection top-bottom pivoted
- without gauge heads
- Glass protection

General Data

Center-to-center ME	max. 1000 mm
Sight length	ME – 80 mm
Diameter of glass tube*)	Ø 13,5 x 1,75mm
Process connection	male thread G 1/2 DIN ISO 228

Materials

- gauge heads	SS 1.4571
- gaskets for glass tube	PTFE
- glass tube	DURAN


The materials may vary depending upon availability.

Design Data

Design temperature / Design pressure	up to 100°C / 10 bar up to 200°C / 8 bar
--------------------------------------	---

Accessories

glass protection**)	plexiglass cover Ø 42mm
visual help	coloured float
Scale	division and unity to customers spec.

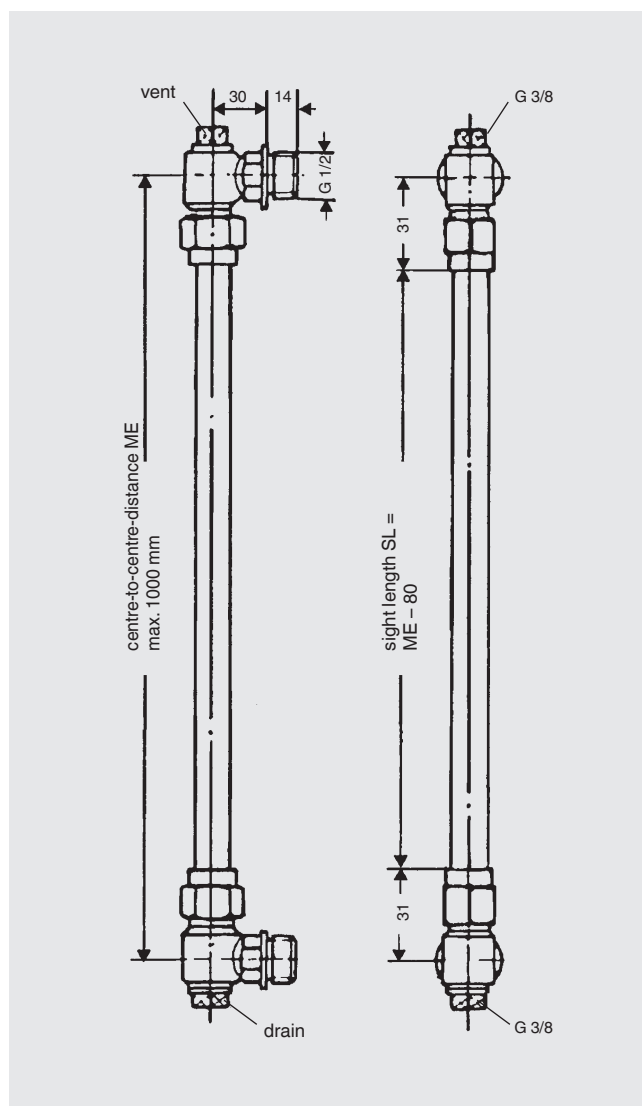

*) length glasstube = ME – 20 mm

**) length = ME – 30, product temperature max. 80°C.