

## Globe valve type WA10

### Application and function

As shutoff valve in pipes, e.g. connection pipe between steam boiler and water level limiter.

The area of application comprises the entire product range of magnetic level gauges and float switches.

### Technical basic equipment

- Valve form: straight through
- Process connection: Flange or welding end according to DIN
- Valve housing: C-steel
- Inner parts of valve: stainless steel



### Available (optional) versions

- Other process connection on request

### Technical data

Allowable pressure	PS [bar]	10	32	50	80	100
Allowable temperature	TS [° C]	195	239	265	296	312

Installation information: Valve spindle must be in horizontale position  
Arrow on valve body (housing) must point towards standpipe

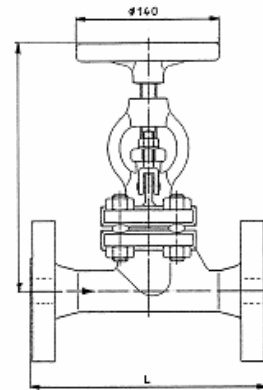

PS [bar]	Dimension M		Contact face Form	Dimension [mm]		PS [bar]	Welding end					Dimension [mm]	
	DN	DIN		DIN	L		H	DN	DIN	ø d1	ø d2	ø d3	L
13	20	2633	2526-C	150	220	13	20	3239-2	22	28	26,9	150	220
	25			28,5					34	33,7	160		
32	20	2635		150		160	32	20	25	22	28	26,9	150
	25									28,5	34	33,7	160
80		2637	2526-E	230	80	20	25	27					
100		2638											

